


Model 799LF Low frequency, filtered accelerometer



Features

- High sensitivity
- Ultra low-noise electronics for clear signals at very low vibration levels
- Optimized for 15V supply
- Low pass filtered to eliminate high frequencies
- Hermetic sealing
- ESD protection
- Reverse wiring protection

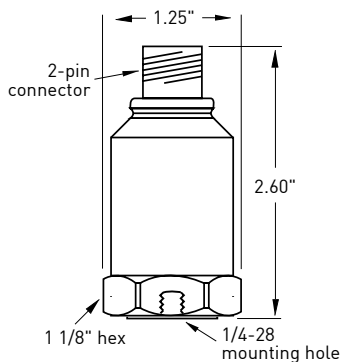

Dynamic

Sensitivity, ±5%, 25°C.....	500 mV/g
Acceleration range	10 g peak
Amplitude nonlinearity.....	1%
Frequency response:	
-5%.....	0.3 - 1,200 Hz
-10%.....	0.2 - 1,600 Hz
-3 dB	0.1 - 2,500 Hz
Resonance frequency	18 kHz
Transverse sensitivity, max.....	5% of axial
Temperature response.....	-50°C -7%
	+120°C +0%

Electrical

Power requirement: voltage source.....	15 - 30 VDC
current regulating diode	2 - 10 mA
Electrical noise, equiv. g:	
Spectral	
0.10 Hz.....	15 µg/√Hz
1 Hz.....	3 µg/√Hz
10 Hz.....	1 µg/√Hz
100 Hz.....	1 µg/√Hz

Output impedance, max	400 Ω
Bias output voltage.....	8.0 VDC
Grounding.....	case isolated, internally shielded

Environmental

Temperature range	-50 to 120°C
Vibration limit.....	250 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv. g.....	150 µg/gauss
Sealing	hermetic
Base strain sensitivity	0.0005 g/µstrain

Physical

Sensing element design	PZT ceramic / shear
Weight	205 grams
Case material.....	316L stainless steel
Mounting	1/4-28 tapped hole
Output connector.....	2 pin, MIL-C-5015 style
Mating connector	R6 type
Recommended cable.....	J9T2A

Connector pin	Function
Shell	ground
A	power/ signal
B	common

Accessories supplied: SF6 mounting stud (International customers specify mounting requirements); calibration data (level 3)

ALTHEN reserves the right to vary the foregoing details without prior notice