

DMU02

Six Degrees of Freedom Dynamics Measurement Unit



The DMU02 combines MEMS angular rate and linear acceleration sensors to create a simple to use six-degrees of-freedom dynamics measurement unit for complete motion sensing and control in three-dimensional space.

Using Silicon Sensing's proven MEMS ring gyro technology the DMU02 offers unsurpassed accuracy and reliability in an affordable and compact package. Angular rate and acceleration data is supplied by the DMU02 every millisecond to meet the needs of highly responsive control systems.

The DMU02 provides a cost effective solution for a wide range of applications requiring a complete six-degrees-of-freedom motion sensing module.

DMU02 is simple to mount via 2 screws, optional alignment dowels and an 8 pin connector.

Key Features

- A compact six-degrees-of-freedom module, providing Roll, Pitch, Yaw angular rate plus Longitudinal, Lateral and Vertical translational acceleration
- Benchmark bias and scale factor performance
- Full scale dynamic range $\pm 300^\circ/\text{s}$ and $\pm 6g$
- Robust MEMS based strapdown system
- 1 cubic inch unit
- +5V supply
- Built In Test (BIT)
- 4 wire industry standard SPI interface


Typical Applications

- Platform stabilisation & control
- Air, sea and land applications
- Robotics
- Antenna stabilisation
- Vehicle dynamic sensing
- Navigation aiding
- Autonomous vehicles (ROVs and UAVs)
- Laboratory
- Biomechanics



DMU02

Six Degrees of Freedom Dynamics Measurement Unit

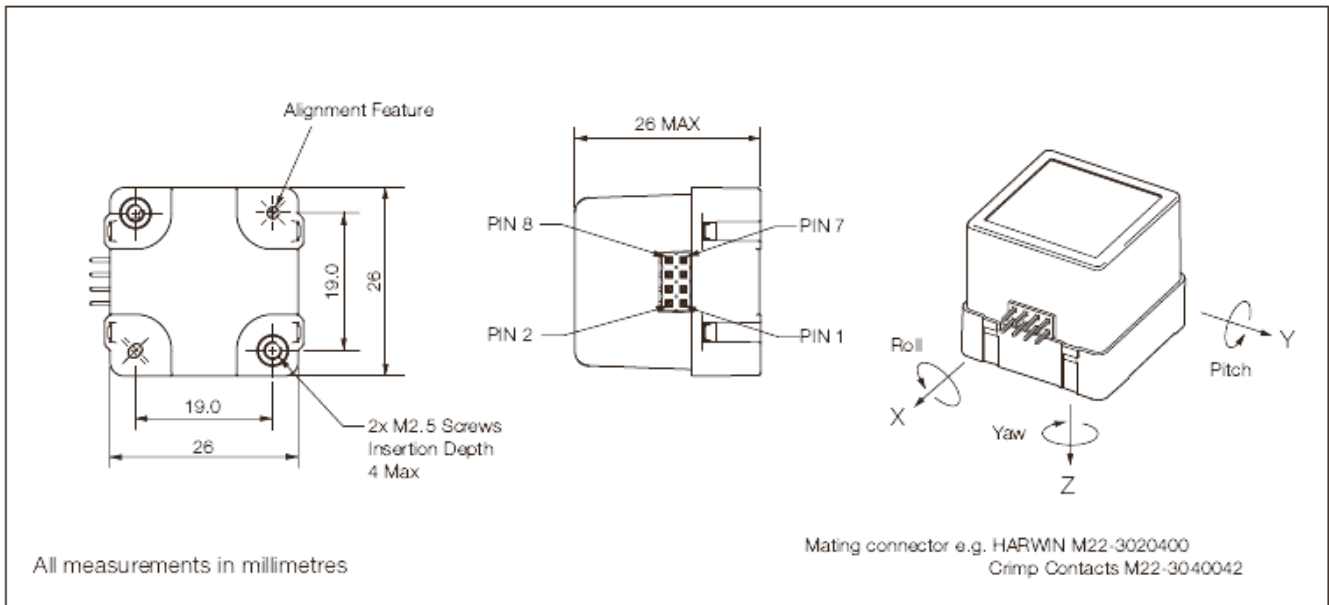

Typical Data

Output format	SPI
Default message format	Pitch, Y Acc; Roll, X Acc; Yaw, Z Acc
Supply voltage	5V
Operating temperature range	-40°C to +85°C
Start-up-time	< 1s
Weight	< 12gram

Angular Rate Function	
Rate range	±300°/s
Scale factor	0.03125°/s/bit (16bit)
Scale factor variation with temperature	< ±0.7% (including nonlinearity)
Bias variation with temperature	< ±0.4°/s
Bias instability (Allan Variance)	< 5°/hr
Angular Random Walk	< 0.3°/rt hr
Bandwidth (-3dB)	> 45Hz
Rate noise (in band)	< 0.5°/s rms
g sensitivity	< 0.1°/s/g

Linear Acceleration Function	
Acceleration range	±6g
Resolution	3.66mg/bit
Scale factor error over temperature	< 2%
Linearity	0.1% FS
Bias error over temperature	< 2.0 mg/°C
Bandwidth (-3dB)	> 350Hz
Acceleration noise	20mg rms

RoHS Compliant	Yes
-----------------------	-----

Pin Connections

1	+5V	Power supply
2	MOSI	SPI data input
3	MISO	SPI data output
4	CLK	SPI serial clock
5	GND	Power ground
6	Select	S0 Pitch, Y Acc
7	Select	S1 Yaw, Z Acc
8	Select	S2 Roll, X Acc

USB-based development equipment is available.

Specification subject to change without notice.
© Copyright 2009
Silicon Sensing Systems Limited
All rights reserved.

DMU02-00-0100-131 Rev 2
DCR No. 62000255

The device mark Silicon Sensing is a registered trade mark of Silicon Sensing Systems Community Trade Mark 003587664